


# GPU type GB2/3

**Ground Power Unit type GB2/3**  
**3kVA– 115/200V 400Hz**  
**28V<sub>DC</sub> – 60A – 1300A**

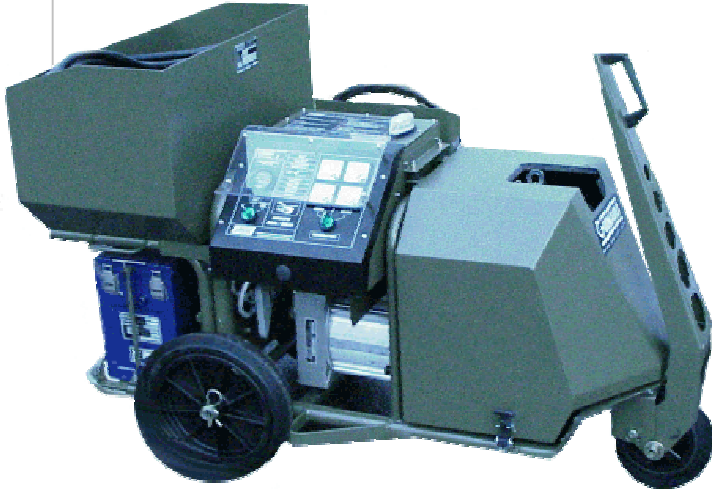

- ➔ **Diesel engine GPU**
- ➔ **Transportable in helicopter : two modules of 85kg each**

## Characteristics

AC output	
Rated Power	3kVA
Voltage	115/200V three phases + neutral
Voltage regulation	± 1,5%
Power factor	0,8
Frequency	400 Hz
Frequency regulation	± 3%
DC output	
Rated Power	1,7kW
Permanent current	60A
Peak current	1300A
Voltage	28,5V <sub>DC</sub>
Voltage regulation	± 0,5V <sub>DC</sub> from 0 to 60A



**GUINAULT SA**  
PAOS La Saussaye  
F - 45590 Saint-Cyr en Val  
Tél : +33 (0) 2 38 63 84 00  
Fax : +33 (0) 2 38 69 66 22  
[www.guinault.com](http://www.guinault.com)



## Engine

- Lombardini type 15LD315
- Diesel,
- Air cooled
- Speed: 3429 rpm
- 1 cylinder, 315cm<sup>3</sup>
- Manual and electrical start

## Bi-Alternator

- Guinault type AB100
- 400Hz, 115/200V
- 14 poles, brushless
- Electronic voltage regulator Guinault type RS525

## Safeties

### Electrical

- Over Voltage
- Under Voltage
- Over Frequency
- Under Frequency
- Over Load

### Engine

- High Temperature
- Low Oil Pressure

## Outputs

- 1 AC output 115/200V-400Hz, length 8 m. + socket ISO461 / Stanag 3303
- 1 DC output 28V<sub>DC</sub>, length 8 m. + socket ISO461 / Stanag 3302

## Main assembly

- Welded tubular frame, anti-corrosion coating
- Inflate tyres
- Cables storage compartments
- Fuel tank 4,3 litres


## Options

- Cold start aid

## Operation

- Used to start helicopter , to supply 115V/400Hz to avionics devices and charge the aircraft Ni-Cd battery
- Can be separate in two modules (≅ 85kg each) for easier handling and lifting

## Dimensions

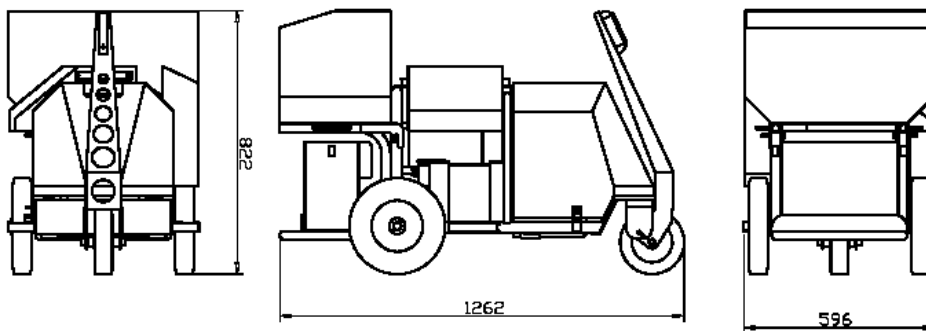

L 1262 x W 596 x H 822 mm

Weight: 170kg (= 87kg + 83kg)



PAOS La Saussaye  
 F - 45590 Saint-Cyr en Val  
 Tél : +33 (0) 2 38 63 84 00  
 Fax : +33 (0) 2 38 69 66 22

[info@guinault.com](mailto:info@guinault.com)